




# PALLET QUOTATION REQUEST

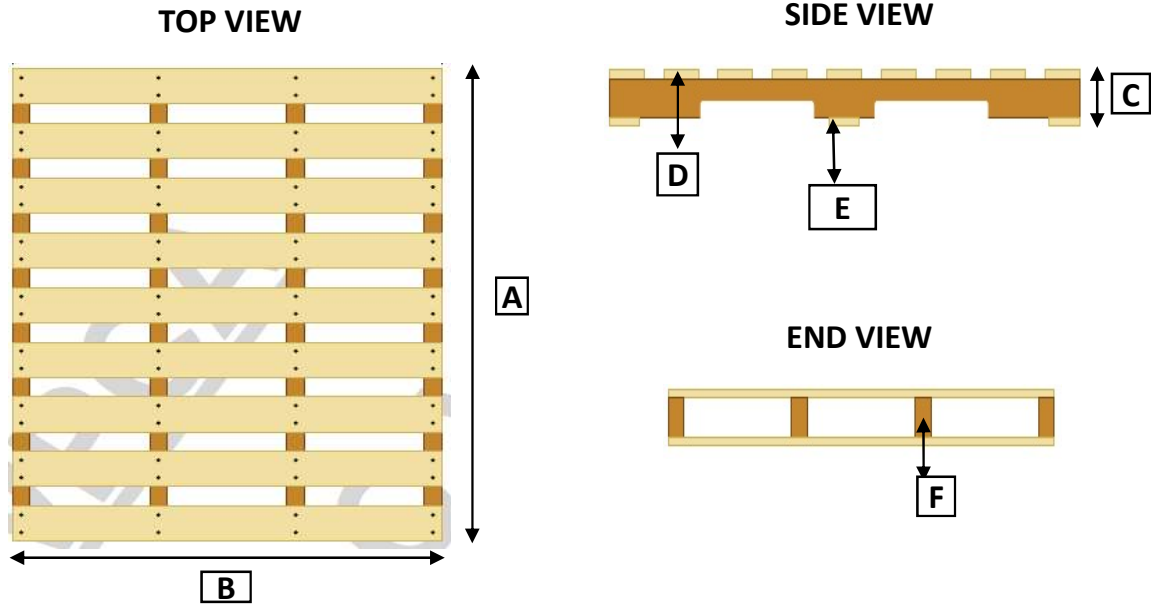

DIMENSIONS				
A = TOTAL LENGTH (Inch)				
B = TOTAL WIDTH (Inch)				
C = TOTAL HEIGHT (Inch)				
PALLET CONFIGURATION				
D = TOP BOARDS QUANTITY				
E = BOTTOM BOARDS QUANTITY				
F = STRINGER OR BLOCK QUANTITY				
G = TWO OR FOUR WAYS				
FEATURES				
H = MAXIMUM LOAD (LBS)				
I = MONTHLY AMOUNT				
J = NUMBER OF STACKS				
K = RACK SIZE (IF APPLY)				
L = TREATMENT	HT	KILN DRIED	IMPREGNATED	WITHOUT
SPECIAL FEATURES				
M = PAINTED OR LOGO				
N = CHAMPFER				
DELIVERY PLACE				

**HT:** According ISPM-15, requirement is to achieve a minimum temperature of 56 °C for a minimum duration of 30 continuous minutes throughout the entire profile of the wood (including its core). In order to eliminate insects and larvae. Apply for exportation.

**Kiln dry:** At same as HT, timber enters in a controlled chamber where is constantly heated until it reaches a moisture percentage below 19%. Apply for exportation.

**Without:** Products without HT or Kiln dried timber does not apply for exportation